



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

REACH-IN REFRIGERATORS

MODEL: ☐ ACRR23FD-60 ☐ ACRR49FD-60



ACRR23FD-60



ACRR49FD-60


Admiral Craft Refrigeration Reach-In Refrigerators store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Refrigerators are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NOMINAL STORAGE CAPACITY

ACRR23FD-60 23 Cu Ft (651 L)
ACRR49FD-60 49 Cu Ft (1387 L)

TEMPERATURE

Holding temperature 34°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system




Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471

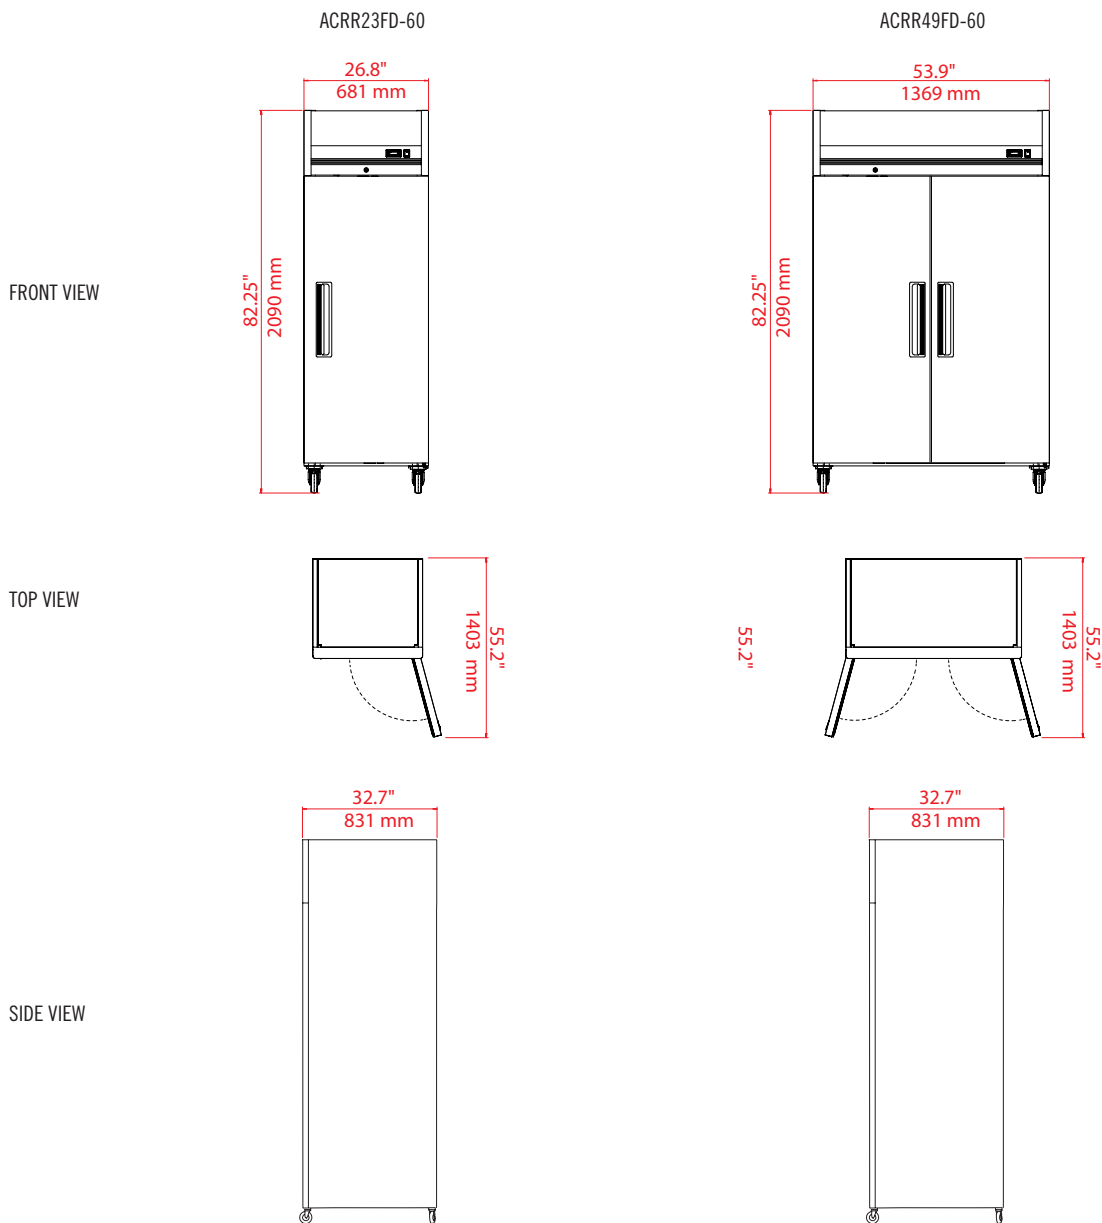

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRR23FD-60	26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm)	21.9" x 26.5" x 52.1" (556 x 673 x 1324 mm)	23 Cu Ft (651 L)	34°F to 41°F (1°C to 5°C)	3.0A	311 lbs (143 kg)	R134a 340g	1 / 3	220V / 60Hz / 1Ph
ACRR49FD-60	53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm)	49.1" x 26.5" x 52.1" (1246 x 673 x 1324 mm)	49 Cu Ft (1387 L)	34°F to 41°F (1°C to 5°C)	4.0A	536 lbs (244 kg)	R134a 530g	2 / 6	220V / 60Hz / 1Ph



Admiral Craft

Refrigeration.

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

GLASS DOOR REACH-IN REFRIGERATORS

MODEL: ☐ ACRR23GD-60 ☐ ACRR49GD-60



ACRR23GD-60



ACRR49GD-60


Admiral Craft Refrigeration Glass Door Reach-In Refrigeration combines durability and longevity with visual appeal. Featuring an energy efficient bottom mounted compressor, the glass door refrigerators effectively display foodservice products at the ideal temperature to preserve freshness and extend shelf life. Simple to use programmable solid state digital controls allow for accurate and flexible use of the unit.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking, dual-pane glass doors with easy to grip handles
- Adjustable heavy-duty wire shelves (4 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED interior lighting & temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NOMINAL STORAGE CAPACITY

ACRR23GD-60..... 23 Cu Ft (651 L)

ACRR49GD-60..... 49 Cu Ft (1387 L)

TEMPERATURE

Holding temperature 34°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

3RD PARTY APPROVALS




Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471

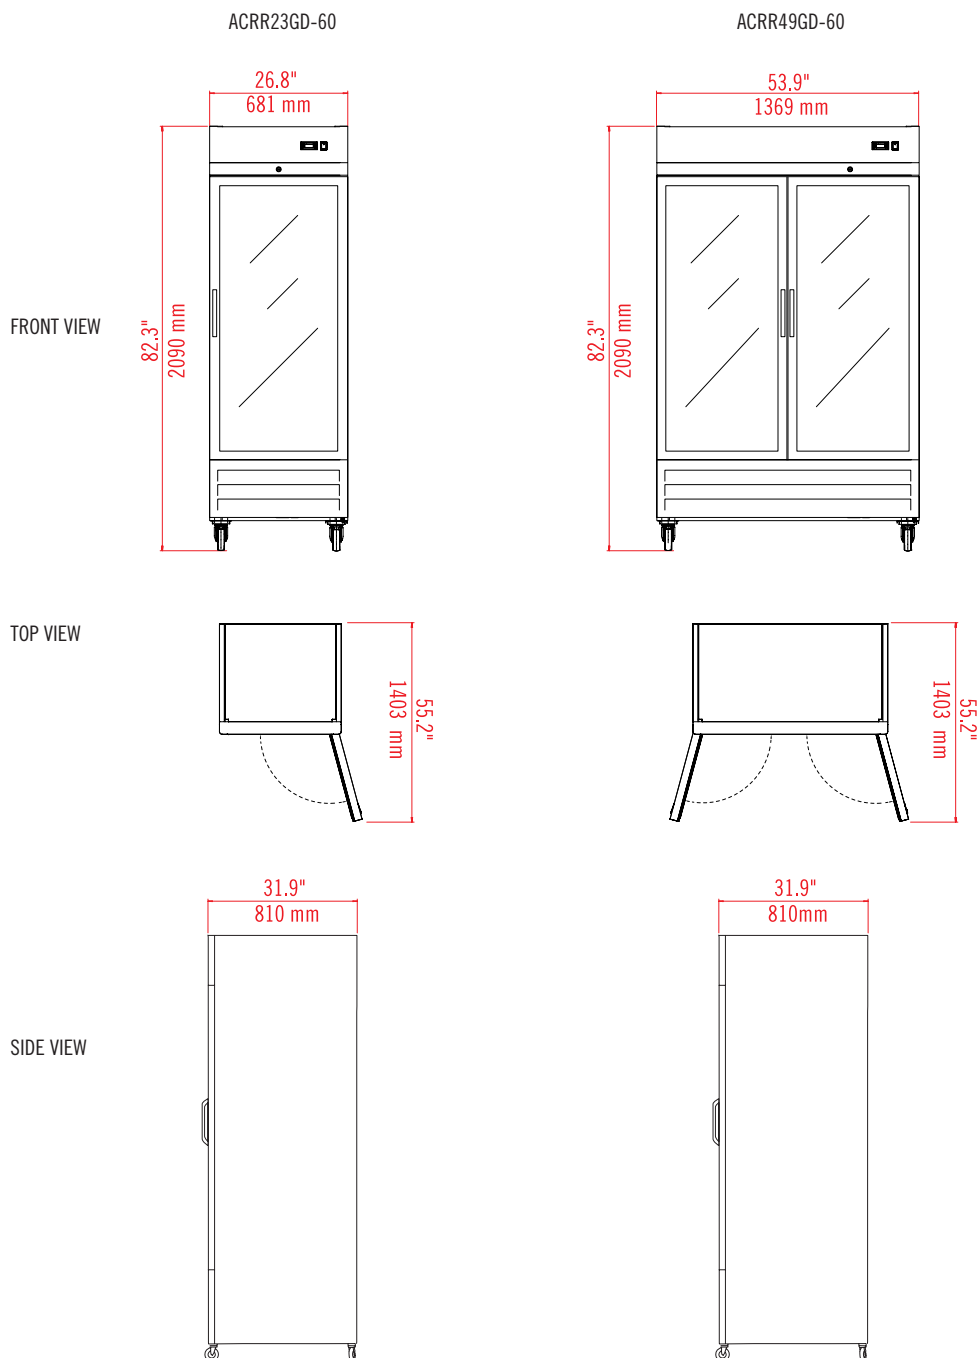

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRR23GD-60	26.8" x 31.9" x 82.3" (681 x 810 x 2090 mm)	22.2" x 27.6" x 50.2" (564 x 700 x 1276 mm)	23 Cu Ft (651 L)	34°F to 41°F (1°C to 5°C)	3.0A	366 lbs (166 kg)	R134a 340g	1 / 4	220V / 60Hz / 1Ph
ACRR49GD-60	53.9" x 31.9" x 82.3" (1369 x 810 x 2090 mm)	49.4" x 27.6" x 50.2" (1254 x 700 x 1276 mm)	49 Cu Ft (1387 L)	34°F to 41°F (1°C to 5°C)	3.8A	597 lbs (272 kg)	R404A 650g	2 / 8	220V / 60Hz / 1Ph



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER FREEZERS

MODEL: ☐ ACRF27U-60 ☐ ACRF48U-60 ☐ ACRF60U-60 ☐ ACRF72U-60



ACRF27U-60



ACRF48U-60



ACRF60U-60



ACRF72U-60


Admiral Craft Refrigeration stainless steel Undercounter Freezers are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our undercounter models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food preparation.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters
- Solid state digital control system
- LED temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NET STORAGE CAPACITY

ACRF27U-60.....	6.5 Cu Ft (184 L)
ACRF48U-60.....	12 Cu Ft (340 L)
ACRF60U-60.....	15.5 Cu Ft (439 L)
ACRF72U-60.....	18 Cu Ft (510 L)

3RD PARTY APPROVALS




Intertek

Certified to ANSI NSF 7

TEMPERATURE

Holding temperature -4°F to 10°F (-20°C to -12°C)

- Efficient forced-air refrigeration system

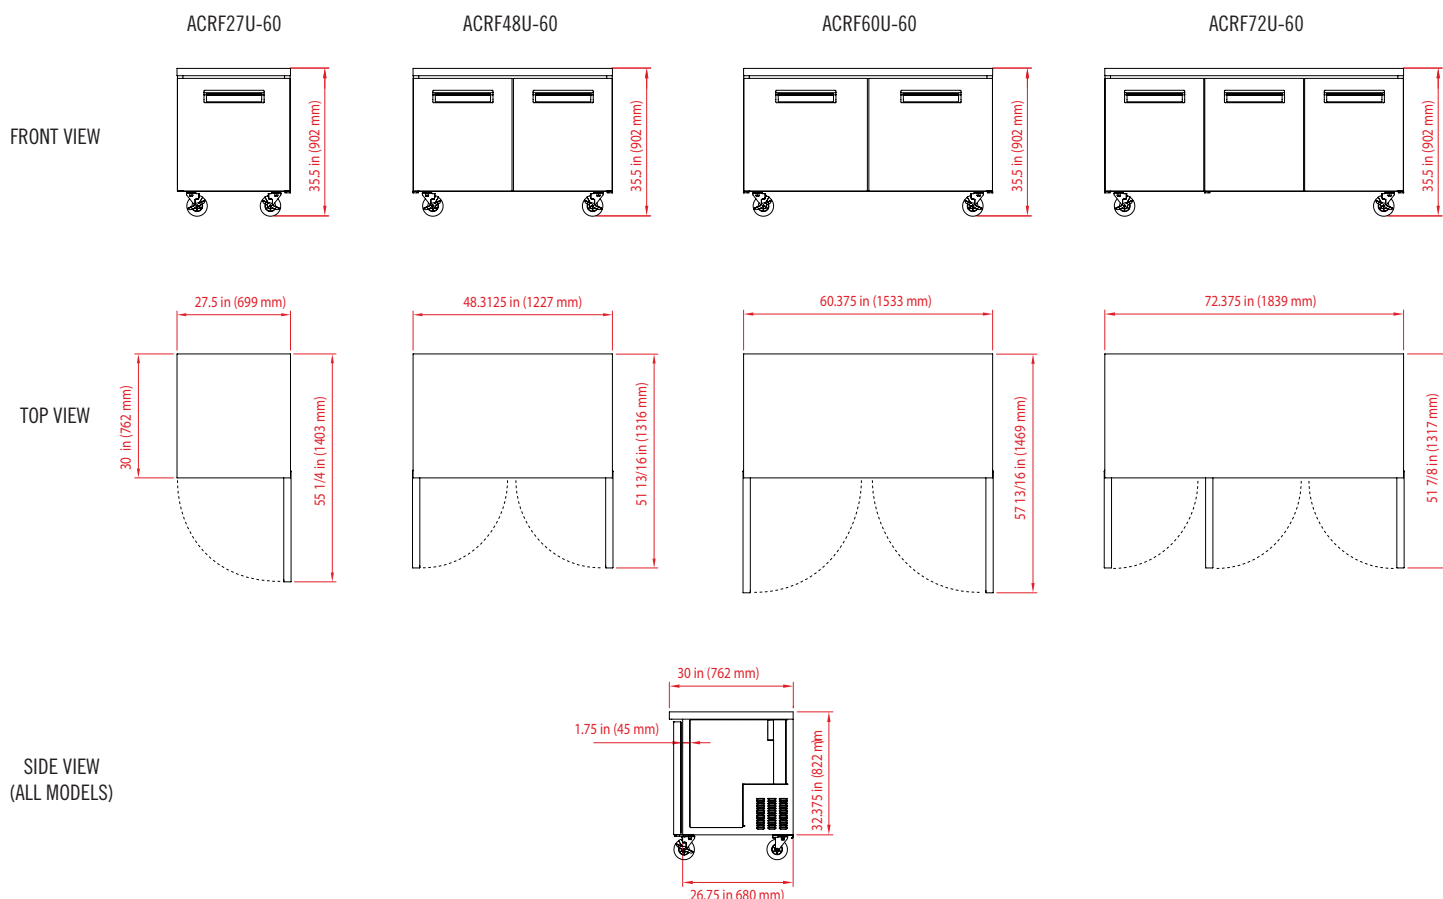

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRF27U-60	27.5" x 30" x 35.5" (699 x 762 x 911 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	6.5 Cu Ft (184 L)	-4°F to 10°F (-20°C to -12°C)	3.8A	224 lbs (102 kg)	R404A 349g	1 / 1	220V / 60Hz / 1Ph
ACRF48U-60	48.3125" x 30" x 35.5" (1227 x 762 x 911 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	-4°F to 10°F (-20°C to -12°C)	3.8A	310 lbs (141 kg)	R404A 349g	2 / 2	220V / 60Hz / 1Ph
ACRF60U-60	60.375" x 30" x 35.5" (1533 x 762 x 911 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	-4°F to 10°F (-20°C to -12°C)	3.8A	362 lbs (166 kg)	R404A 400g	2 / 2	220V / 60Hz / 1Ph
ACRF72U-60	72.375" x 30" x 35.5" (1839 x 762 x 911 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	-4°F to 10°F (-20°C to -12°C)	3.8A	430 lbs (195 kg)	R404A 400g	3 / 3	220V / 60Hz / 1Ph



Admiral Craft

Refrigeration.

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

GLASS DOOR REACH-IN FREEZER

MODEL: ☐ ACRF23GD-60



ACRF23GD-60


Admiral Craft Refrigeration Glass Door Reach-In Freezer combines durability and longevity with visual appeal. Featuring an energy efficient bottom mounted compressor, the glass door freezer effectively displays foodservice products at the ideal temperature to preserve freshness and extend shelf life. Simple to use programmable solid state digital controls allow for accurate and flexible use of the unit.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking, dual-pane glass doors with easy to grip handles
- Adjustable heavy-duty wire shelves (4 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED interior lighting & temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NOMINAL STORAGE CAPACITY

ACRF23GD-60 20.8 Cu Ft (589 L)

TEMPERATURE

Holding temperature -7.6°F to -0.4°F (-22°C to -18°C)

- Efficient forced-air refrigeration system



Intertek


Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471

GLASS DOOR REACH-IN FREEZER

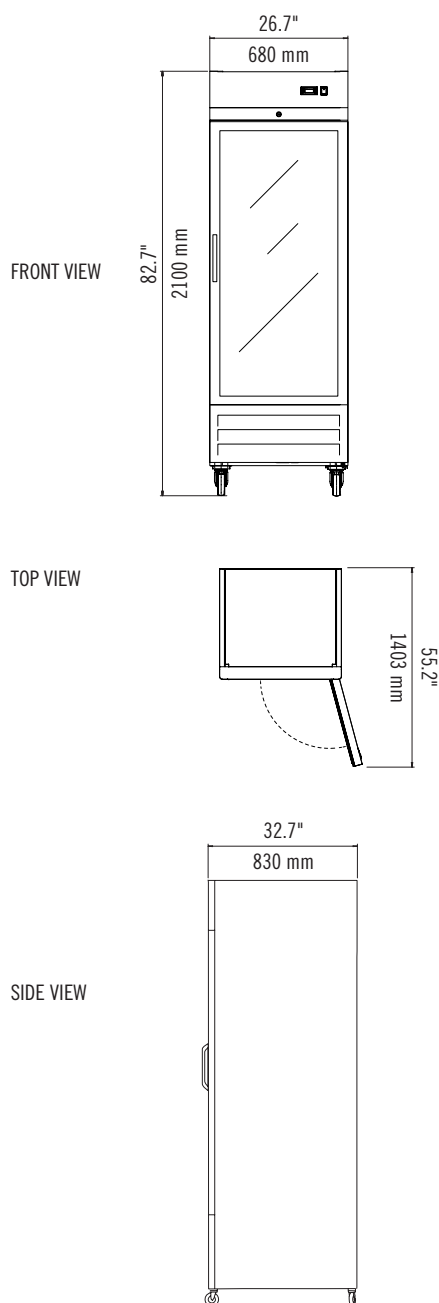

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRF23GD-60	26.7" x 32.7" x 82.7" (680 x 830 x 2100 mm)	22.2" x 27.6" x 50.2" (564 x 700 x 1276 mm)	20.8 Cu Ft (589 L)	-7.6°F to -0.4°F (-22°C to -18°C)	4.8A	366 lbs (166 kg)	R404A 400g	1 / 4	220V / 60Hz / 1Ph



Admiral Craft

Refrigeration.

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

REACH-IN FREEZERS

MODEL: ☐ ACRF23FD-60 ☐ ACRF49FD-60 ☐ ACRF72FD-60



ACRF23FD-60



ACRF49FD-60



ACRF72FD-60


Admiral Craft Refrigeration Reach-In Freezers store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Freezers are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NOMINAL STORAGE CAPACITY

ACRF23FD-60	23 Cu Ft (651 L)
ACRF49FD-60	49 Cu Ft (1387 L)
ACRF72FD-60	72 Cu Ft (2039 L)

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7




Intertek

Certified to ANSI UL 471

TEMPERATURE

Holding temperature -10°F to 10°F (-23°C to -12°C)

- Efficient forced-air refrigeration system

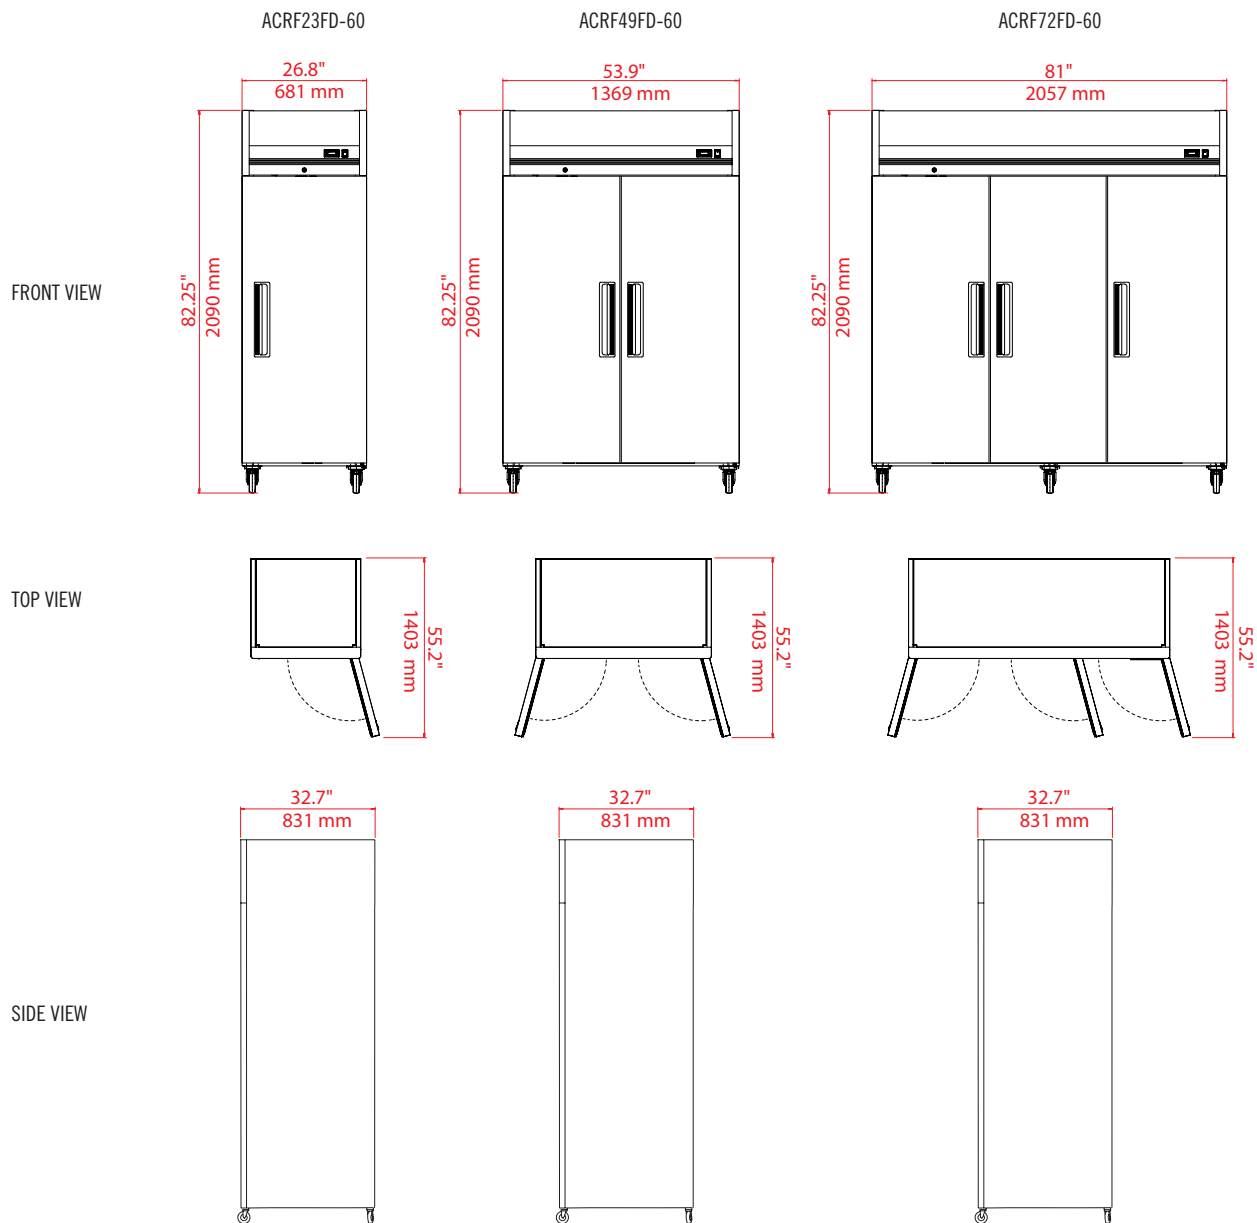

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRF23FD-60	26.8" x 32.7" x 82.25" (681 x 831 x 2090 mm)	21.9" x 26.5" x 52.1" (556 x 673 x 1324 mm)	23 Cu Ft (651 L)	-10°F to 10°F (-23°C to -12°C)	4.8A	336 lbs (140 kg)	R404A 400g	1 / 3	220V / 60Hz / 1Ph
ACRF49FD-60	53.9" x 32.7" x 82.25" (1369 x 831 x 2090 mm)	49.1" x 26.5" x 52.1" (1246 x 673 x 1324 mm)	49 Cu Ft (1387 L)	-10°F to 10°F (-23°C to -12°C)	5.5A	502 lbs (160 kg)	R404A 755g	2 / 6	220V / 60Hz / 1Ph
ACRF72FD-60	81" x 32.7" x 82.25" (2057 x 831 x 2090 mm)	76.1" x 26.5" x 52.1" (1933 x 673 x 1324 mm)	72 Cu Ft (2039 L)	-10°F to 10°F (-23°C to -12°C)	7.0A	601 lbs (195 kg)	R404A 840g	3 / 9	220V / 60Hz / 1Ph




CHEF BASES

MODEL: ☐ ACRCB48-60 ☐ ACRCB60-60 ☐ ACRCB72-60



ACRCB48-60

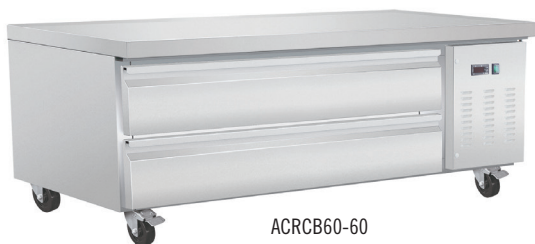

ACRCB60-60



ACRCB72-60


Admiral Craft Refrigeration Chef Bases are designed to streamline your foodservice operations. Our drawer models provide plenty of refrigerated storage space and quick, easy access to your food items. Constructed of all stainless steel, our chef stands provide additional room for countertop equipment such as grills. Equipped with 5" diameter swivel casters, two with brakes, full extension drawer slides and LED temperature display, you can depend on Admiral Craft Refrigeration Chef Bases.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Easy to grip recessed door handles
- Full extension, heavy-duty drawer slides
- Equipped with four (4) 5" swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and drawers
- Front-breathing refrigeration system

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

NET STORAGE CAPACITY (Cu Ft / L)

ACRCB48-60 6.5 Cu Ft (184 L)

ACRCB60-60 8.8 Cu Ft (249 L)

ACRCB72-60 11.1 Cu Ft (314 L)

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7

TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)



- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance





FRONT VIEW

TOP VIEW



ACRCB48-60

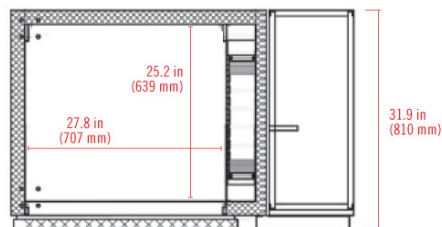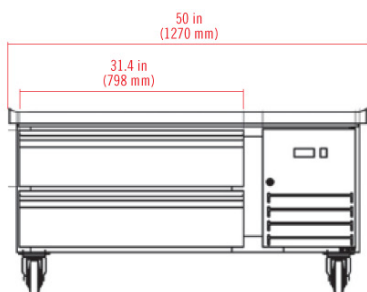


ACRCB60-60

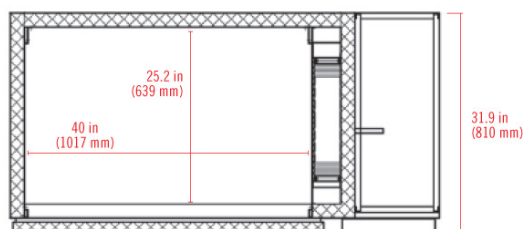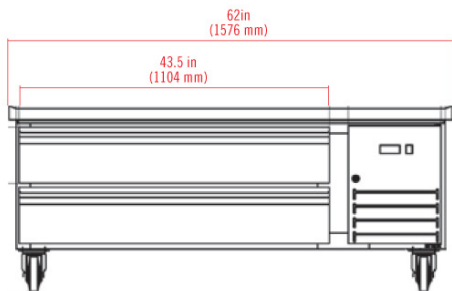

ACRCB72-60

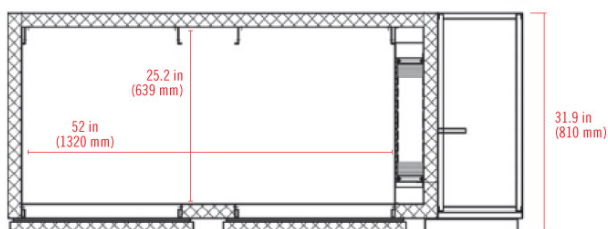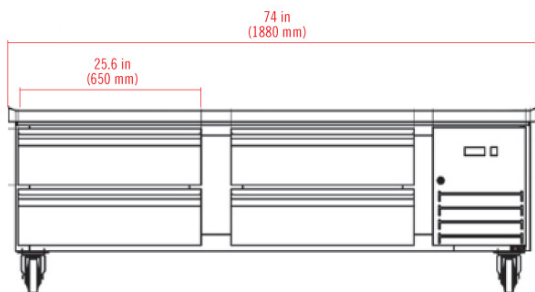

SIDE VIEW
(ALL MODELS)

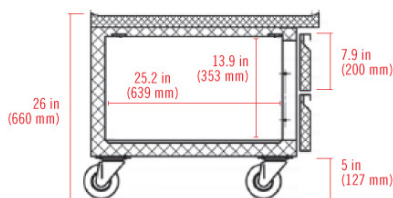

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DRAWERS	ELECTRICAL
ACRCB48-60	50" x 31.9" x 26" (1270 x 810 x 660 mm)	27.8" x 25.2" x 13.9" (707 x 639 x 353 mm)	6.5 Cu Ft (184 L)	33°F to 41°F (1°C to 5°C)	3.8A	260 lbs (118 kg)	R134a 250g	2	220V / 60Hz / 1Ph
ACRCB60-60	62" x 31.9" x 26" (1576 x 810 x 660 mm)	40" x 25.2" x 13.9" (1017 x 639 x 353 mm)	8.8 Cu Ft (249 L)	33°F to 41°F (1°C to 5°C)	3.8A	302 lbs (137 kg)	R134a 280g	2	220V / 60Hz / 1Ph
ACRCB72-60	74" x 31.9" x 26" (1880 x 810 x 660 mm)	52" x 25.2" x 13.9" (1320 x 639 x 353 mm)	11.1 Cu Ft (314 L)	33°F to 41°F (1°C to 5°C)	3.8A	353 lbs (160 kg)	R134a 350g	4	220V / 60Hz / 1Ph



SANDWICH / SALAD STATIONS

MODEL: ☐ ACRR29S-60 ☐ ACRR48S-60 ☐ ACRR60S-60 ☐ ACRR72S-60



ACRR29S-60



ACRR48S-60



ACRR60S-60



ACRR72S-60


Admiral Craft Refrigeration Sandwich and Salad Stations allow for easy accessibility, optimum storage capacity and flexibility for quick and easy food preparation. Choose from 4 models offering storage from 7, 12, 15.5 and 18 cubic feet that accommodate 8, 12, 16 and 18 pans. Constructed of stainless steel, easy grip recessed handles, LED temperature display and equipped with a cutting board our Sandwich and Salad Stations will streamline your food prep operations.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans
- Equipped with 11.42" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471


NET STORAGE CAPACITY (Cu Ft & 1/6 Pans)

ACRR29S-60	7 Cu Ft (198 L) / 8 Pans
ACRR48S-60	12 Cu Ft (340 L) / 12 Pans
ACRR60S-60	15.5 Cu Ft (439 L) / 16 Pans
ACRR72S-60	18 Cu Ft (510 L) / 18 Pans

TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

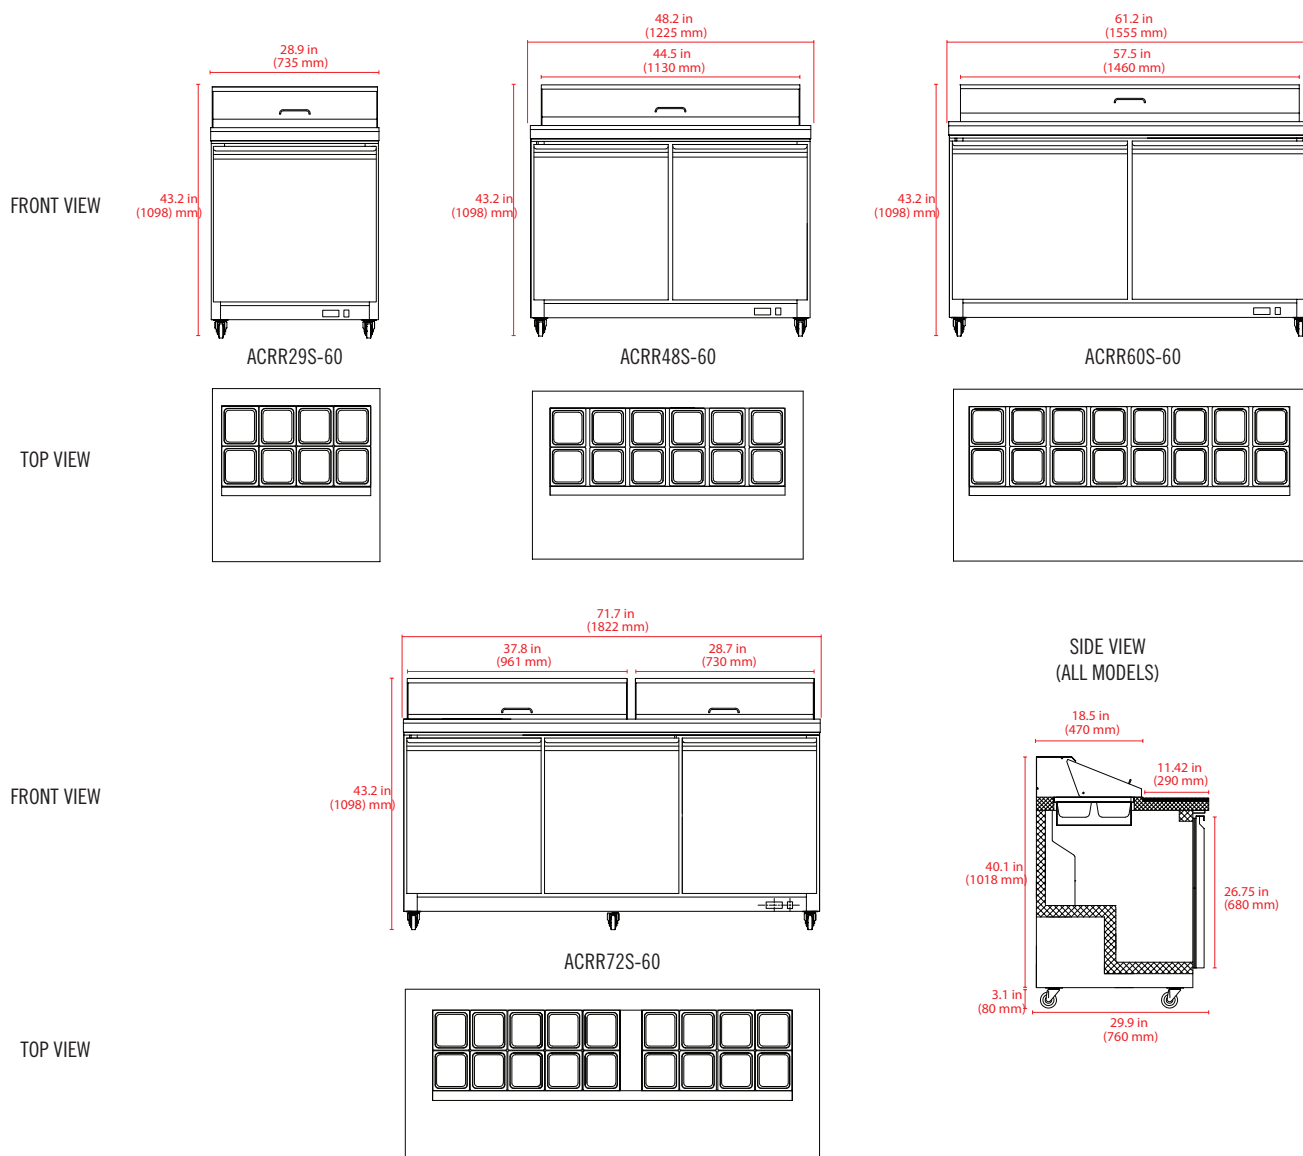

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
ACRR29S-60	28.9" x 29.9 x 43.2" (699 x 760 x 1098 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7 Cu Ft (198 L)	33°F to 41°F (1°C to 5°C)	2.5A	218 lbs (99 kg)	R134a 270g	1 / 1	8	220V / 60Hz / 1Ph
ACRR48S-60	48.2" x 29.9 x 43.2" (1225 x 760 x 1098 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	33°F to 41°F (1°C to 5°C)	2.5A	304 lbs (140 kg)	R134a 300g	2 / 2	12	220V / 60Hz / 1Ph
ACRR60S-60	61.2" x 29.9 x 43.2" (1555 x 760 x 1098 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	33°F to 41°F (1°C to 5°C)	3.8A	352 lbs (160 kg)	R134a 300g	2 / 2	16	220V / 60Hz / 1Ph
ACRR72S-60	71.7" x 29.9 x 43.2" (1822 x 760 x 1098 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	33°F to 41°F (1°C to 5°C)	3.8A	430 lbs (195 kg)	R-134a 300g	3 / 3	18	220V / 60Hz / 1Ph



Admiral Craft

Refrigeration.

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER REFRIGERATORS

MODEL: ☐ ACRR27U-60 ☐ ACRR48U-60 ☐ ACRR60U-60 ☐ ACRR72U-60



ACRR27U-60



ACRR48U-60



ACRR60U-60



ACRR72U-60


Admiral Craft Refrigeration stainless steel Undercounter Refrigerators are designed to provide the user with maximum storage, energy savings and cold, accurate temperatures. Our undercounter models allow for easy accessibility, optimum capacity and flexibility for quick and efficient food preparation.

FEATURES AND CONSTRUCTION

- Durable, easy to clean stainless steel exterior and painted aluminum interior
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters
- Solid state digital control system
- LED temperature display
- Automatic defrost system
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

220V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) Type G cord set included



Type G

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7


NET STORAGE CAPACITY

ACRR27U-60	6.5 Cu Ft (184 L)
ACRR48U-60	12 Cu Ft (340 L)
ACRR60U-60	15.5 Cu Ft (439 L)
ACRR72U-60	18 Cu Ft (510 L)

TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

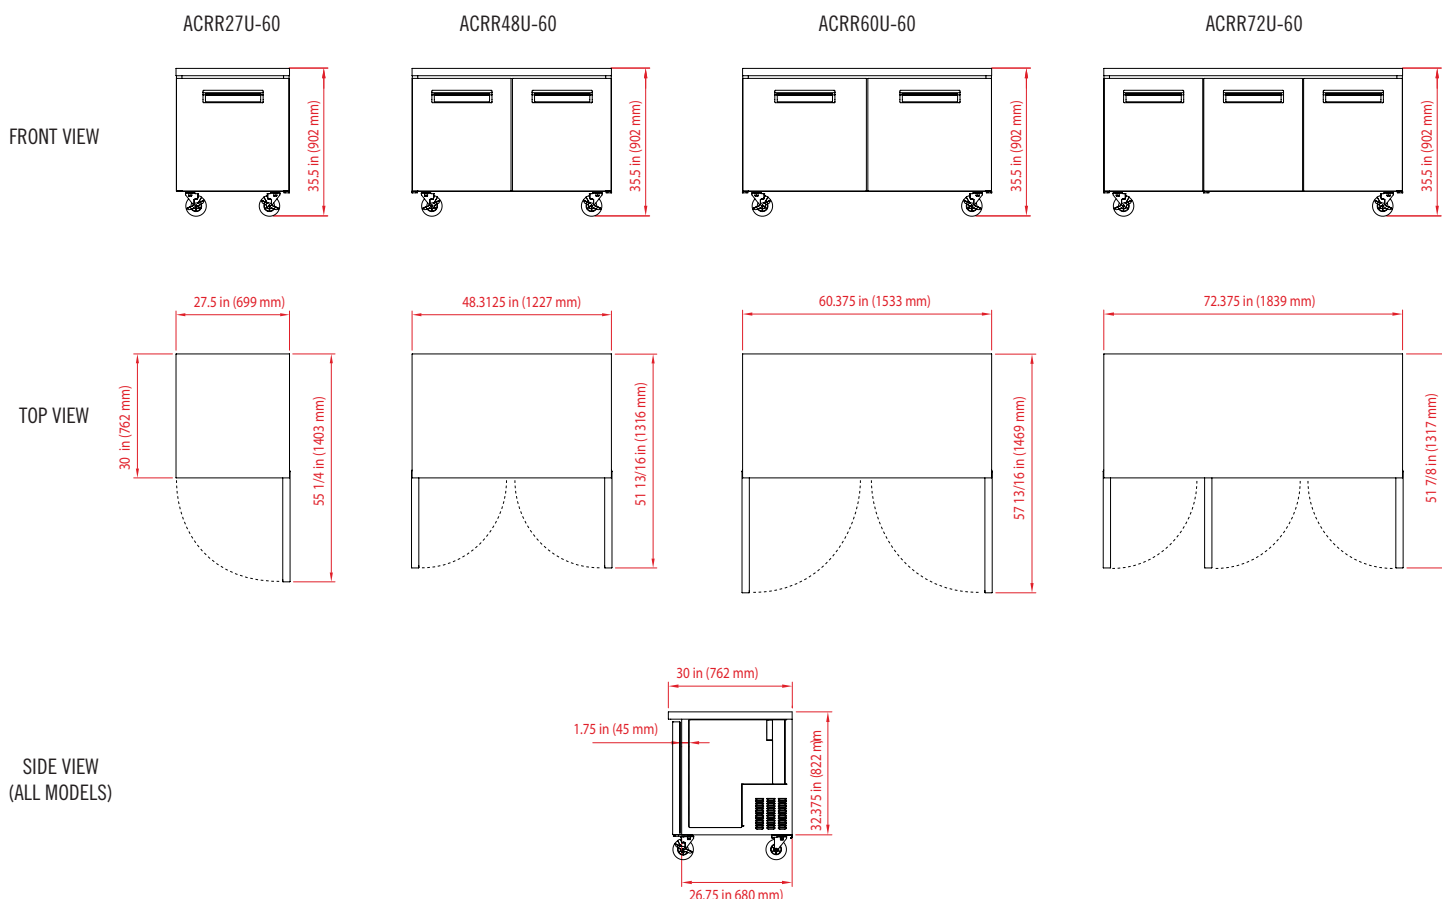

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
ACRR27U-60	27.5" x 30" x 35.5" (699 x 762 x 911 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	6.5 Cu Ft (184 L)	33°F to 41°F (1°C to 5°C)	2.5A	220 lbs (100 kg)	R134a 270g	1 / 1	220V / 60Hz / 1Ph
ACRR48U-60	48.3125" x 30" x 35.5" (1227 x 762 x 911 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	33°F to 41°F (1°C to 5°C)	2.5A	304 lbs (140 kg)	R134a 270g	2 / 2	220V / 60Hz / 1Ph
ACRR60U-60	60.375" x 30" x 35.5" (1533 x 762 x 911 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	33°F to 41°F (1°C to 5°C)	3.8A	352 lbs (160 kg)	R134a 300g	2 / 2	220V / 60Hz / 1Ph
ACRR72U-60	72.375" x 30" x 35.5" (1839 x 762 x 911 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	33°F to 41°F (1°C to 5°C)	3.8A	430 lbs (195 kg)	R134a 300g	3 / 3	220V / 60Hz / 1Ph